

FFWD TYRO SPECSHEET

TUBELESS READY

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	FFWD Ratchet Hub Disc
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	No
Axle Dimensions***	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Steel
Bearing Usage	Front: 2x 6902-2RS Rear DS: 1x 17287-2RS Rear NDS: 1x 15267-2RS Freehub: 2x 15267-2RS


GRAVEL COMPATIBLE

Rimtype	Full Carbon Clincher
ETRTO	19 - 622
Rim Depth	45mm
Rim Internal Width	19mm
Rim External Width	27mm
Min. Valve Lenght	60mm
Min. Tyre Size	23mm
Max. Tyre Size	40mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front: 795gram Rear: 900gram Set: 1695gram
Aeroshape	Yes, DARC™
Rimtape	Tubeless tape; 25mm

VALUE FOR MONEY

Spoke type	Front NDS: DT Competition Front DS: DT Competition Rear NDS: DT Competition Rear DS: DT Competition
Spoke style	Straightpull
Nipple type	DT Pro Lock Brass 15mm
Spoke Count	Front 24 / Rear 24
Spoke lenght (front)	NDS: 272mm DS: 274mm
Spoke lenght (rear)	NDS: 276mm DS: 274mm
Spoke Tension	Front NDS: 1100N Rear DS: 1100N
Spoke Patern	Front NDS: 2 Cross Front DS: 2 Cross Rear NDS: 2 Cross Rear DS: 2 Cross
Color Options	MBL/GRY

DARC PROFILE

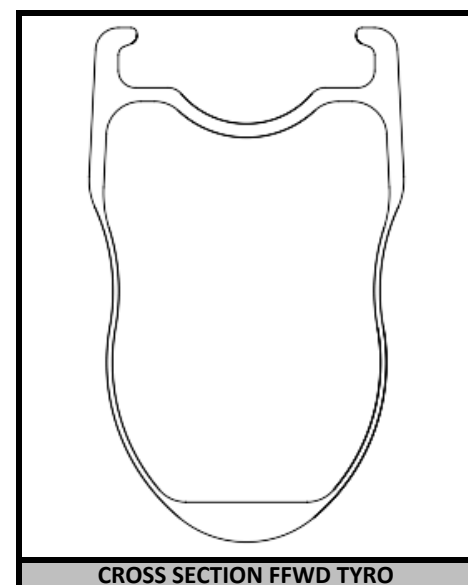

What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions
- High quality padded wheelbag

* Max. tires pressure is based on structural integrity the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)

*** Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc).