

# FFWD RYOT<sup>44</sup> TEAM SPECSHEET

## DT240 EXP 2:1

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	No
Tubeless Compatible	No
Tubular Compatible	Yes
Hub Type	DT Swiss 240 EXP (2:1)
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	No
Axle Dimensions***	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Stainless steel
Bearing Usage	Front        2x 26157-2RS Rear DS       1x 26157-2RS Rear NDS      1x 26157-2RS Freehub       2x 6802-2RS


## PRO TOUR PROVEN

Rimtype	Full Carbon Tubular
ETRTO	700c
Rim Depth	44mm
Rim Internal Width	n.a.
Rim External Width	25mm
Min. Valve Length	60mm
Min. Tyre Size	23mm
Max. Tyre Size	42mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front        645 gram Rear         775 gram Set            1420 gram
Aeroshape	Yes, TEAM TECH
Rimtape	n.a.

## TEAM TECH

Spoke type	Front NDS	DT Aerolite
	Front DS	DT Aerolite
	Rear NDS	DT Aerocomp
	Rear DS	DT Aerocomp
Spoke style	Straightpull	
Nipple type	DT Pro Lock Brass 15mm	
Spoke Count	Front 24 / Rear 24	
Spoke length (front)	NDS	278mm (16x)
	DS	276mm (8x)
Spoke length (rear)	NDS	278mm (8x)
	DS	276mm (16x)
Spoke Pattern	Front NDS	3 Cross
	Front DS	1 Cross
	Rear NDS	1 Cross
	Rear DS	3 Cross
Spoke Tension	Front NDS	1100N
	Rear DS	1100N
Color Options	MBL/WHT	

## WIDE TUBULAR RIM

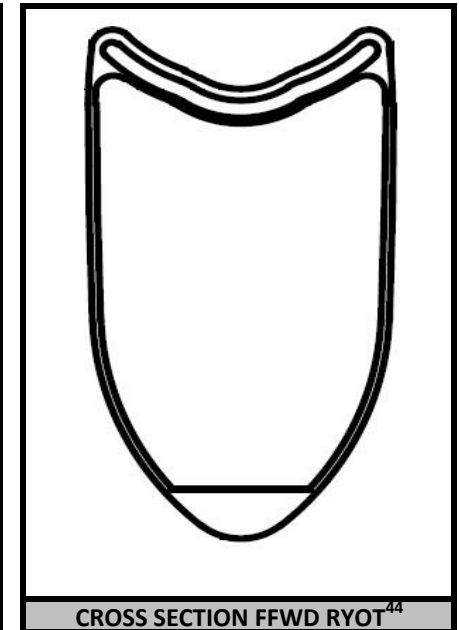

What's in the box:	
→	Wheelset
→	Pre-installed tubeless tape
→	Pair of alloy tubeless valves
→	Tubeless installation instructions
→	High quality padded wheelbag

\* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

\*\* Weights may differ +/- 5% (due to handbuilding process of rims)

\*\*\* Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)