

FFWD RYOT77 TRACK SPEC SHEET

FFWD TRACK HUBS

Disc Brake Compatible	No
Rim Brake Compatible	No
Innertube Compatible	No
Tubeless Compatible	No
Tubular Compatible	Yes
Hub Type	FFWD TRACK (black)
Campa Option	n.a.
Shimano Option	n.a.
XDR Option	n.a.
Microspline Option	n.a.
Axle Dimensions***	Front 9x100 / Rear 10x120
Disc Rotor Interface	n.a.
Bearing Type	Cartridge; Steel
Bearing Usage	Front 2x 6000-2RS Rear 2x 6000-2RS


ULTIMATE TRACK WEAPON

Rimtype	Full Carbon Tubular
ETRTO	633
Rim Depth	77mm
Rim Internal Width	n.a.
Rim External Width	26mm
Min. Valve Length	90mm
Min. Tyre Size	21mm
Max. Tyre Size	26mm
Max. Tyre Pressure*	13Bar / 160PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front 895 gram Rear 995 gram Set 1890 gram
Aeroshape	Yes, LAW TECH
Rimtape	n.a.

LAW TECH AERO PROFILE

Spoke type	Front NDS	Sapim CX Sprint
	Front DS	Sapim CX Sprint
	Rear NDS	Sapim CX Sprint
	Rear DS	Sapim CX Sprint
Spoke style	J-bend	
Nipple type	DT Pro Lock Brass 15mm	
Spoke Count	Front 20 / Rear 24	
Spoke length (front)	NDS	216mm (10x)
	DS	216mm (10x)
Spoke length (rear)	NDS	234mm (12x)
	DS	234mm (12x)
Spoke Pattern	Front NDS	Radial
	Front DS	Radial
	Rear NDS	2 Cross
	Rear DS	2 Cross
Spoke Tension	Front NDS	1000N
	Rear DS	1100N
Color Options	WHITE	

TRACK SPECIFIC DESIGN

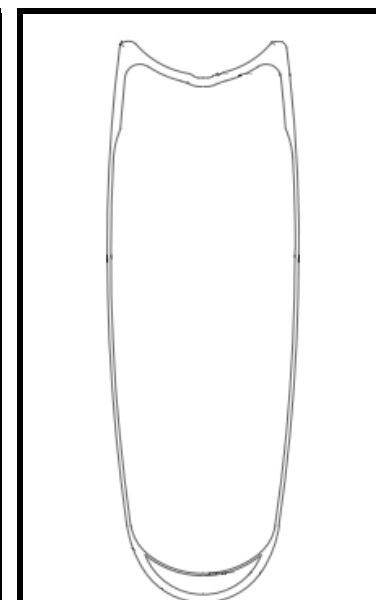

CROSS SECTION FFWD RYOT77

What's in the box:

- Wheelset
- Sprocket locking
- Valve extenders (2pcs.)
- High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weight may differ +/- 5% (due to handbuilding process of rims)