

FFWD OUTLAW 29 SPEC SHEET

TUBELESS READY

Disc Brake Compatible	Yes
Innertube Compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	FFWD RATCHET BOOST
Shimano HG Option	Yes
XD Option	Yes
Microspline Option	Yes
Wheel size / hub spacing	29" / Boost
Axle Dimensions***	Front 15x110 Rear 12x148
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Steel
Bearing Usage	Front DS 6902-2RS Front NDS 6902-2RS Rear DS 6903-2RS Rear NDS 6902-2RS


XC / AM USAGE

Rimtype	Full Carbon Clincher
Rimstyle	Hookless / wide bead
ETRTO	30 - 622 (29")
Rim Depth	26mm
Rim Internal Width	30mm
Rim External Width	37mm
Min. Valve Length	40mm
Min. Tyre Size	50mm
Max. Tyre Size	70mm
Max. Tyre Pressure*	3Bar / 44PSI
Max. Rider Weight	140kg / 265lbs
Weight**	Front 705 gram Rear 890 gram Set 1595 gram
Rimtape	Tubeless tape; 32mm

WIDE HOOKLESS BEAD

Spoke type	Front NDS Sapim CX Ray Front DS Sapim CX Ray Rear NDS Sapim CX Sprint Rear DS Sapim CX Sprint
Spoke style	Straightpull
Nipple type	DT Pro Lock Brass 15mm
Spoke Count	Front 28 / Rear 28
Spoke length (front)	NDS 298mm (14x) DS 300mm (14x)
Spoke length (rear)	NDS 300mm (14x) DS 298mm (14x)
Spoke Pattern	Front NDS 3 cross Front DS 3 cross Rear NDS 3 cross Rear DS 3 cross
Spoke Tension	Front NDS 1100N Rear DS 1100N
Color Options	BLACK

29" / BOOST

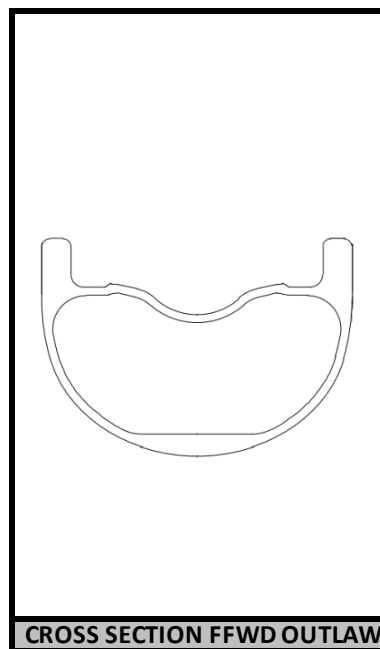

CROSS SECTION FFWD OUTLAW

What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)

*** Interchangeable endcaps available for most common axle standards (12x110, 5x141 etc.)