

## FFWD DRIFT SPECSHEET

### GRAVEL SPECIFIC

Disc Brake Compatible	<b>Yes</b>
Rim Brake Compatible	<b>No</b>
Innertube compatible	<b>Yes</b>
Tubeless Compatible	<b>Yes</b>
Tubular Compatible	<b>No</b>
Hub Type	<b>FFWD RATCHET (2:1)</b>
Campa Option	<b>Yes</b>
Shimano Option	<b>Yes</b>
XDR Option	<b>Yes</b>
Microspline Option	<b>No</b>
Axle Dimensions***	<b>Front 12x100 / Rear 12x142</b>
Disc Rotor Interface	<b>Centerlock</b>
Bearing Type	<b>Cartridge; Steel</b>
Bearing Usage	<b>Front 2x 6902-2RS</b> <b>Rear DS 1x 6903-2RS</b> <b>Rear NDS 1x 6902-2RS</b> <b>Freehub 2x 6902-2RS</b>


### TYRES UP TO 60MM

Rimtype	<b>Full Carbon Clincher</b>
ETRTO	<b>24 - 622</b>
Rim Depth	<b>36mm</b>
Rim Internal Width	<b>24mm</b>
Rim External Width	<b>30mm</b>
Min. Valve Length	<b>50mm</b>
Min. Tyre Size	<b>30mm</b>
Max. Tyre Size	<b>60mm</b>
Max. Tyre Pressure*	<b>5Bar / 72PSI</b>
Max. Rider Weight	<b>120kg / 265lbs</b>
Weight**	<b>Front 740 gram</b> <b>Rear 880 gram</b> <b>Set 1620 gram</b>
Aeroshape	<b>No</b>
Rimtape	<b>Tubeless tape; 27mm</b>

### HOOKLESS RIM DESIGN

Spoke type	<b>Front NDS DT Aerocomp</b> <b>Front DS DT Aerocomp</b> <b>Rear NDS DT Aerocomp</b> <b>Rear DS DT Aerocomp</b>
Spoke style	<b>Straightpull</b>
Nipple type	<b>DT Pro Lock Brass 15mm</b>
Spoke Count	<b>Front 24 / Rear 24</b>
Spoke length (front)	<b>NDS 286mm (16x)</b> <b>DS 282mm (8x)</b>
Spoke length (rear)	<b>NDS 282mm (8x)</b> <b>DS 286mm (16x)</b>
Spoke Pattern	<b>Front NDS 3 Cross</b> <b>Front DS 1 Cross</b> <b>Rear NDS 3 Cross</b> <b>Rear DS 1 Cross</b>
Spoke Tension	<b>Front NDS 1100N</b> <b>Rear DS 1100N</b>
Color Options	<b>MBL/WHT</b>

### FFWD RATCHET 2:1

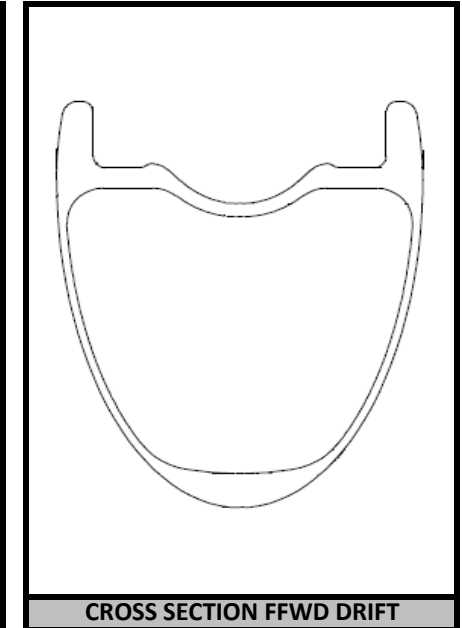

What's in the box:	
→	Wheelset
→	Pre-installed tubeless tape
→	Pair of alloy tubeless valves
→	Tubeless installation instructions
→	High quality padded wheelbag

\* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

\*\* Weights may differ +/- 5% (due to handbuilding process of rims)

\*\*\* Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)