

FFWD RYOT77 SPEC SHEET

FFWD N/GAGE

| | |
|-----------------------|---|
| Disc Brake Compatible | Yes |
| Rim Brake Compatible | No |
| Innertube Compatible | Yes |
| Tubeless Compatible | Yes |
| Tubular Compatible | No |
| Hub Type | FFWD N/GAGE (2:1) |
| Campa Option | Yes |
| Shimano Option | Yes |
| XDR Option | Yes |
| Microspline Option | Yes |
| Axle Dimensions | Front 12x100 / Rear 12x142 |
| Disc Rotor Interface | Centerlock |
| Bearing Type | Cartridge; steel |
| Bearing Usage | Front 2x 26157-2RS Rear DS 1x 6902-2RS Rear NDS 1x 26157-2RS Freehub 2x 6802-2RS |


ULTIMATE SPEED WEAPON

| | |
|---------------------|---|
| Rimtype | Full Carbon Clincher |
| ETRTO | 23 - 622 |
| Rim Depth | 77mm |
| Rim Internal Width | 23mm |
| Rim External Width | 31mm |
| Min. Valve Length | 90mm |
| Min. Tyre Size | 25mm |
| Max. Tyre Size | 42mm |
| Max. Tyre Pressure* | 7,6Bar / 110PSI |
| Max. Rider Weight | 120kg / 265lbs |
| Weight** | Front 850 gram Rear 990 gram Set 1840 gram |
| Aeroshape | Yes, LAW TECH |
| Rimtape | Tubeless tape; 27mm |

LAW TECH AERO PROFILE

| | |
|----------------------|--|
| Spoke type | Front NDS Sapim CX Ray Front DS Sapim CX Ray Rear NDS Sapim CX Sprint Rear DS Sapim CX Sprint |
| Spoke style | Straightpull |
| Nipple type | DT Pro Lock Brass 15mm |
| Spoke Count | Front 24 / Rear 24 |
| Spoke length (front) | NDS 244mm (16x) DS 240mm (8x) |
| Spoke length (rear) | NDS 240mm (8x) DS 244mm (16x) |
| Spoke Pattern | Front NDS 3 Cross Front DS 1 Cross Rear NDS 1 Cross Rear DS 3 Cross |
| Spoke Tension | Front NDS 1100N Rear DS 1100N |
| Color Options | BLACK |

TUBELESS READY

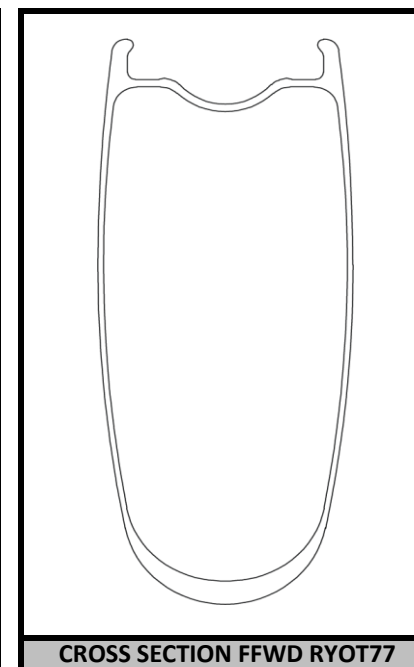

What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions
- High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 3% (due to handbuilding process of rims)