

## FFWD RYOT44 SPECSHEET

### FFWD N/GAGE

|                       |   |
|-----------------------|---|
| Disc Brake Compatible | <b>Yes</b>  |
| Rim Brake Compatible  | <b>No</b>   |
| Innertube Compatible  | <b>Yes</b>  |
| Tubeless Compatible   | <b>Yes</b>  |
| Tubular Compatible    | <b>No</b>   |
| Hub Type              | <b>FFWD N/GAGE (2:1)</b>  |
| Campa Option          | <b>Yes</b>  |
| Shimano Option        | <b>Yes</b>  |
| XDR Option            | <b>Yes</b>  |
| Microspline Option    | <b>Yes</b>  |
| Axle Dimensions       | <b>Front 12x100 / Rear 12x142</b>   |
| Disc Rotor Interface  | <b>Centerlock</b>   |
| Bearing Type          | <b>Cartridge; Steel</b>   |
| Bearing Usage         | <b>Front 2x 26157-2RS</b><br><b>Rear DS 1x 6902-2RS</b><br><b>Rear NDS 1x 26157-2RS</b><br><b>Freehub 2x 6802-2RS</b> |


### ULTIMATE ALLROUND

|                     |   |
|---------------------|---|
| Rimtype             | <b>Full Carbon Clincher</b>   |
| ETRTO               | <b>23 - 622</b>   |
| Rim Depth           | <b>44mm</b>   |
| Rim Internal Width  | <b>23mm</b>   |
| Rim External Width  | <b>30mm</b>   |
| Min. Valve Length   | <b>60mm</b>   |
| Min. Tyre Size      | <b>25mm</b>   |
| Max. Tyre Size      | <b>42mm</b>   |
| Max. Tyre Pressure* | <b>7,6Bar / 110PSI</b>  |
| Max. Rider Weight   | <b>120kg / 265lbs</b>   |
| Weight**            | <b>Front 695 gram</b><br><b>Rear 835 gram</b><br><b>Set 1530 gram</b> |
| Aeroshape           | <b>Yes, LAW TECH</b>  |
| Rimtape             | <b>Tubeless tape; 27mm</b>  |

### LAW TECH AERO PROFILE

|                      |  |
|----------------------|--|
| Spoke type           | <b>Front NDS Sapim CX Ray</b><br><b>Front DS Sapim CX Ray</b><br><b>Rear NDS Sapim CX Sprint</b><br><b>Rear DS Sapim CX Sprint</b> |
| Spoke style          | <b>Straightpull</b>  |
| Nipple type          | <b>DT Pro Lock Brass 15mm</b>  |
| Spoke Count          | <b>Front 24 / Rear 24</b>  |
| Spoke length (front) | <b>NDS 278mm (16x)</b><br><b>DS 274mm (8x)</b>   |
| Spoke length (rear)  | <b>NDS 274mm (8x)</b><br><b>DS 278mm (16x)</b>   |
| Spoke Pattern        | <b>Front NDS 3 Cross</b><br><b>Front DS 1 Cross</b><br><b>Rear NDS 1 Cross</b><br><b>Rear DS 3 Cross</b>                           |
| Spoke Tension        | <b>Front NDS 1100N</b><br><b>Rear DS 1100N</b>   |
| Color Options        | <b>BLACK</b>   |

### TUBELESS READY

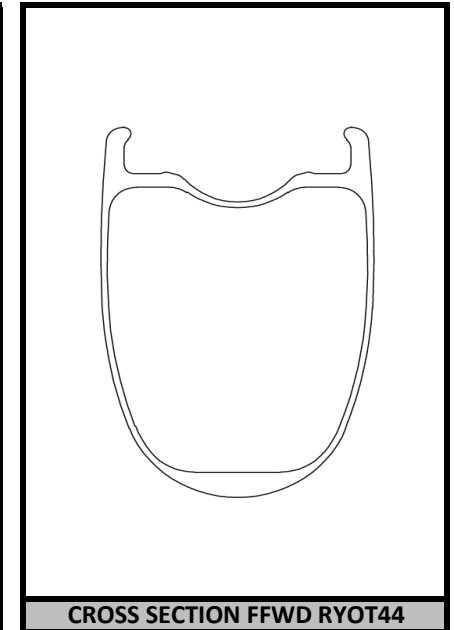

#### What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions
- High quality padded wheelbag

\* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

\*\* Weights may differ +/- 3% (due to handbuilding process of rims)