

FFWD FALCON RS DISC FCC SPECSHEET

SUPERLIGHT

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	FFWD RATCHET DISC
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	No
Campa N3W Option	Yes
Axle Dimensions	Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; CeramicSpeed
Bearing Usage	Rear DS 6902-RS Rear NDS 6902-2RS Freehub 2x 6802-2RS


RATCHET HUB

Rimtype	Full Carbon Clincher
ETRTO	23 - 622
Rim Depth	n.a.
Rim Internal Width	23mm
Rim External Width	28mm
Min. Valve Lenght	44mm
Min. Tyre Size	25mm
Max. Tyre Size	32mm
Max. Tyre Pressure*	7,6Bar / 110PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Rear 899 gram
Aeroshape	Lenticular
Rimtape	Tubeless tape; 27mm

DISC BRAKE

Spoke type	Front NDS n.a. Front DS n.a. Rear NDS n.a. Rear DS n.a.
Spoke style	n.a.
Nipple type	n.a.
Spoke Count	n.a.
Spoke lenght (front)	NDS n.a. DS n.a.
Spoke lenght (rear)	DS n.a. NDS n.a.
Spoke Pattern	Front NDS n.a. Front DS n.a. Rear NDS n.a. Rear DS n.a.
Spoke Tension	Front n.a. Rear n.a.
Color	RAW Carbon Gloss

TUBELESS READY

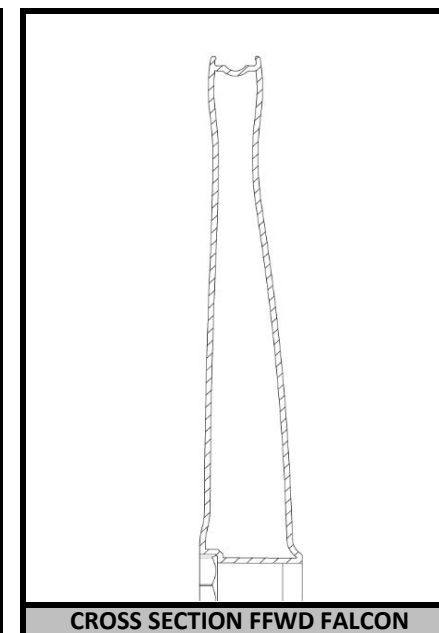

What's in the box:

- Full carbon disc wheel
- Pre-installed tubeless tape
- Alloy tubeless valve
- 90 degree valve adapter
- High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 40gram (due to handbuilding process of the wheel)