

FFWD RYOT44T TUBULAR SPECSHEET

DT240 EXP

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	No
Tubeless Compatible	No
Tubular Compatible	Yes
Hub Type	DT Swiss 240 EXP (2:1)
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	Yes
Axle Dimensions	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Stainless steel
Bearing Usage	Front 2x 26157-2RS Rear DS 1x 26157-2RS Rear NDS 1x 26157-2RS Freehub 2x 6802-2RS


ULTIMATE ALLROUND

Rimtype	Full Carbon Tubular
ETRTO	622
Rim Depth	44mm
Rim Internal Width	n.a.
Rim External Width	30mm
Min. Valve Lenght	60mm
Min. Tyre Size	25mm
Max. Tyre Size	42mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front 620 gram Rear 725 gram Set 1345 gram
Aeroshape	Yes, LAW TECH
Rimtape	n.a.

LAW TECH AERO PROFILE

Spoke type	Front NDS Sapim CX Ray Front DS Sapim CX Ray Rear NDS Sapim CX Sprint Rear DS Sapim CX Sprint
Spoke style	Straightpull
Nipple type	DT Pro Lock Brass 15mm
Spoke Count	Front 24 / Rear 24
Spoke lenght (front)	NDS 278mm (16x) DS 276mm (8x)
Spoke lenght (rear)	NDS 278mm (8x) DS 276mm (16x)
Spoke Pattern	Front NDS 3 Cross Front DS 1 Cross Rear NDS 1 Cross Rear DS 3 Cross
Spoke Tension	Front NDS 1100N Rear DS 1100N
Color Options	BLACK/WHITE

TUBULAR

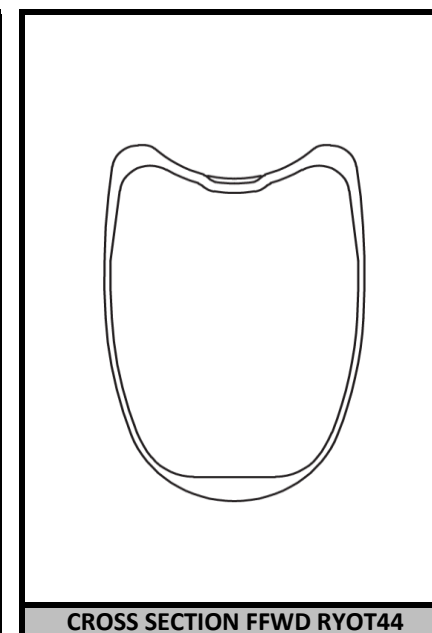

CROSS SECTION FFWD RYOT44

What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions
- High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 3% (due to handbuilding process of rims)

