


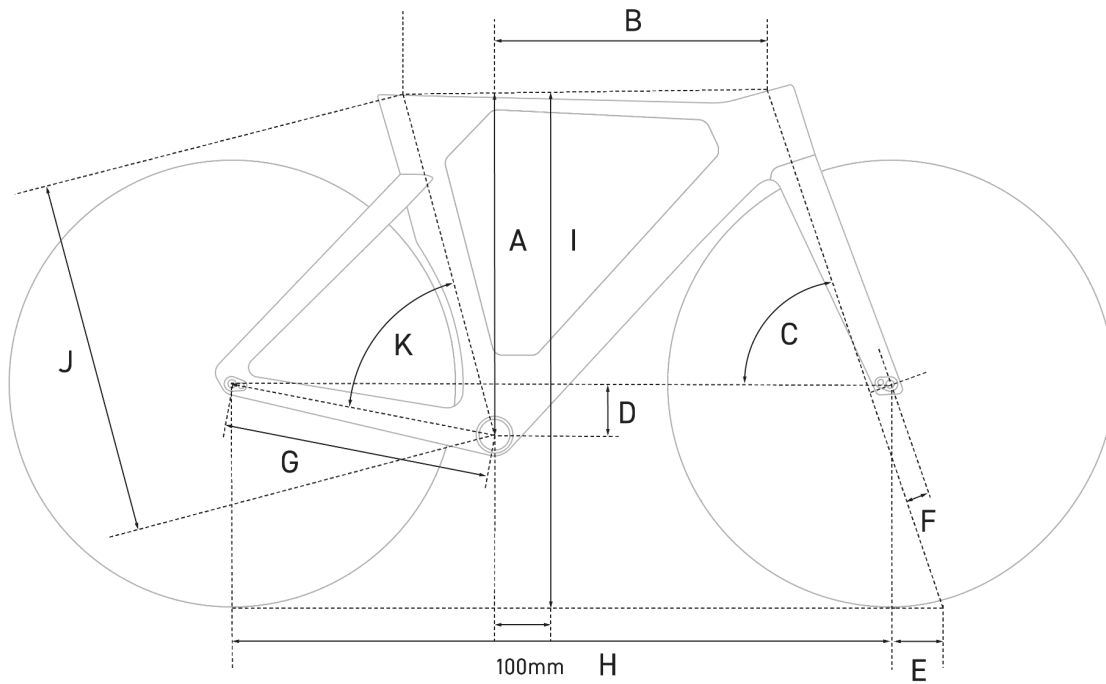

Size		48	52	54	56	58
A	Stack	470	495	520	545	570
B	Reach	385	400	415	430	445
C	Head Tube Angle	71.5°	72.5°	72.5°	72.5°	72.5°
D	BB Drop	78	78	76	76	76
E	Trail	61	62	62	62	62
F	Fork Rake/Offset	51	43	43	43	43
G	Chainstay Length	405	405	405	405	405
H	Wheelbase	968	975	998	1021	1044
I	Bike Standover Height	725	750	777	802	882
J	Seat Tube Length	478	504	530	556	582
K	Seat Tube Angle	76°	76°	76°	76°	76°

**All dimensions in mm.*

SLiCK		
1	Frame	Toray®, Nippon Graphite® Pitch-Based Fiber
2	Fork	SLiCK Wide Stance Fork
3	Seatpost	Factor SLiCK Carbon (Straight post with 42mm adjustment range)
4	Barstem	Standard Build: Vision 3-piece TriMax AeroBar (Trimax Clip-on, Carbon Base Bar, NS SMR II Stem) Premium Build: Vision METRON TFA AeroBar
5	Headset	CeramicSpeed SLT 1-1/8" and 1-3/8" bearings
6	Head Tube Diameter	1-1/8" upper and 1-3/8" lower
7	Saddle Rail Clamps	7x7 (Additional sized clamps can be purchased from Ritchey)
8	Bottom Bracket	CeramicSpeed T47 Aluminium cups CeramicSpeed bearings for 30mm spindle
9	Cable Routing	Internal
10	Compatible Components	Electronic
11	Brake Type	Disc
12	Max Rotor Size	160mm front & rear
13	Max Chainring	56-tooth
14	Front Axle	12 x 100mm thru-axle
15	Rear Axle	12 x 142mm thru-axle
16	Wheelset	Standard Build: Black Inc FIFTY EIGHT Premium Build: Black Inc SIXTY TWO
17	Wheel Size	700c
18	Max Tire Clearance	32mm Measured
19	Frame Weight	1250g
20	Manufacturer Warranty	Limited Lifetime Warranty