

FFWD TYRO RB SPEC SHEET

TUBELESS READY

| | |
|-----------------------|---|
| Disc Brake Compatible | No |
| Rim Brake Compatible | Yes |
| Innertube Compatible | Yes |
| Tubeless Compatible | Yes |
| Tubular Compatible | No |
| Hub Type | FFWD RATCHET RIM BRAKE |
| Campa Option | Yes |
| Shimano Option | Yes |
| XDR Option | Yes |
| Microspline Option | No |
| Axle Dimensions | Front 5x100 / Rear 5x130 |
| Disc Rotor Interface | n.a. |
| Bearing Type | Cartridge; Steel |
| Bearing Usage | Front 2x 699-2RS Rear DS 1x 17287-2RS Rear NDS 1x 6802-2RS Freehub 2x 6902-2RS |


IMPROVED BRAKING SURFACE

| | |
|---------------------|---|
| Rimtype | Full Carbon Clincher |
| ETRTO | 21 - 622 |
| Rim Depth | 45mm |
| Rim Internal Width | 21mm |
| Rim External Width | 29mm |
| Min. Valve Length | 60mm |
| Min. Tyre Size | 23mm |
| Max. Tyre Size | 44mm |
| Max. Tyre Pressure* | 8,3Bar / 120PSI |
| Max. Rider Weight | 100kg / 220lbs |
| Weight** | Front 700 gram Rear 940 gram Set 1640 gram |
| Aeroshape | Yes |
| Rimtape | Tubeless tape; 27mm |

WIDE RIM DESIGN

| | |
|----------------------|--|
| Spoke type | Front NDS Sapim Sprint Front DS Sapim Sprint Rear NDS Sapim Sprint Rear DS Sapim Sprint |
| Spoke style | Straightpull |
| Nipple type | DT Pro Lock Brass 15mm |
| Spoke Count | Front 20 / Rear 24 |
| Spoke length (front) | NDS 266mm (10x) DS 266mm (10x) |
| Spoke length (rear) | NDS 276mm (12x) DS 274mm (12x) |
| Spoke Pattern | Front NDS Radial Front DS Radial Rear NDS 2 Cross Rear DS 2 Cross |
| Spoke Tension | Front 1000N Rear DS 1100N |
| Color Options | BLACK |

VALUE FOR MONEY

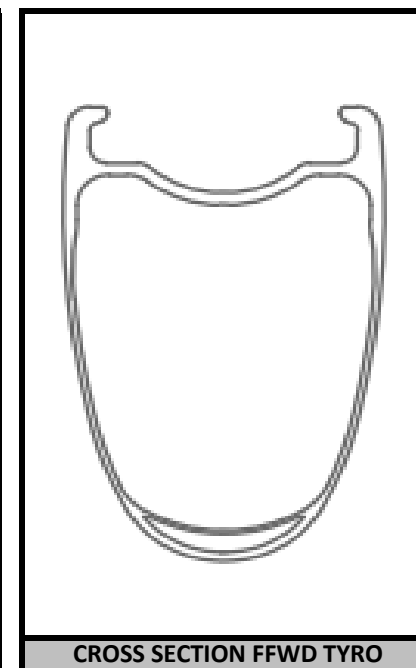

- What's in the box:**
- Wheelset
 - Pre-installed tubeless tape
 - Pair of alloy tubeless valves
 - Tubeless installation instructions
 - Quick release set 'FFWD'
 - Carbon specific brakepads (4pcs.)

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)