

FFWD RYOT⁵⁵ TEAM SPECSHEET

DT240 EXP 2:1

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	No
Tubeless Compatible	No
Tubular Compatible	Yes
Hub Type	DT Swiss 240 EXP (2:1)
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	No
Axle Dimensions***	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Stainless steel
Bearing Usage	Front 2x 26157-2RS Rear DS 1x 26157-2RS Rear NDS 1x 26157-2RS Freehub 2x 6802-2RS


ULTIMATE SPEED WEAPON

Rimtype	Full Carbon Tubular
ETRTO	700c
Rim Depth	55mm
Rim Internal Width	n.a.
Rim External Width	25mm
Min. Valve Length	70mm
Min. Tyre Size	25mm
Max. Tyre Size	42mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front 685 gram Rear 795 gram Set 1470 gram
Aeroshape	Yes, TEAM TECH
Rimtape	n.a.

TEAM TECH

Spoke type	Front NDS	DT Aerolite
	Front DS	DT Aerolite
	Rear NDS	DT Aerocomp
	Rear DS	DT Aerocomp
Spoke style	Straightpull	
	DT Pro Lock Brass 15mm	
Spoke Count	Front 24 / Rear 24	
	NDS	266mm (16x)
Spoke length (front)	DS	264mm (8x)
	NDS	266mm (8x)
Spoke length (rear)	DS	264mm (16x)
	Front NDS	3 Cross
Spoke Pattern	Front DS	1 Cross
	Rear NDS	1 Cross
Spoke Tension	Rear DS	3 Cross
	Front NDS	1100N
Color Options	Rear DS	1100N
	MBL/WHT	

WIDE TUBULAR RIM

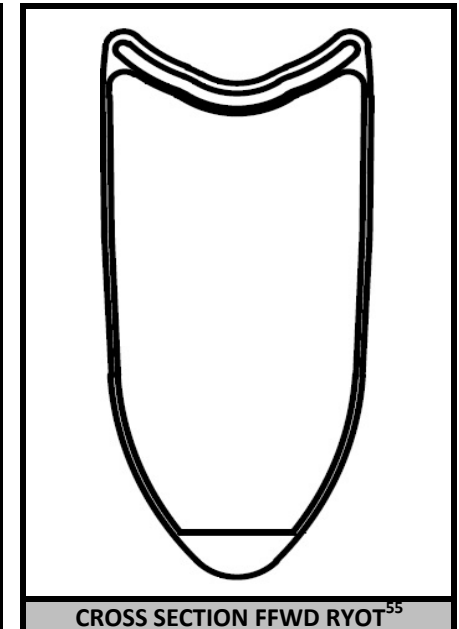

- What's in the box:**
- Wheelset
 - Pre-installed tubeless tape
 - Pair of alloy tubeless valves
 - Tubeless installation instructions
 - High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)

*** Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)